



## 2PC BALL VALVE 1000 WOG MALE x FEMALE



### FEATURES

1000PSI / PN16~PN63

Size: 1/4"~2"

Materials: WCB, S.S.304 (CF8), S.S.316 (CF8M)

Full port, fully opening or closing

Blow-out proof stem, reliable sealing

Two pieces structure, easy operation and maintenance

PED97/23/EC (CE0035) approved

Investment casting approved to AD2000-WO certificate


Threaded: G, NPT, PT, Rp, Rc (ASME B1.20.1, BS2127/99, DIN2999/259, ISO228-1, JIS B 0203, ISO7/1)

Inspection & testing: API598, EN12266, DIN3230/3

Design: ASME B16.34

Applicable medium: water, oil, gas, corrosive liquids

Applicable temperature: -29°C~120°C (higher temperature is available upon request)

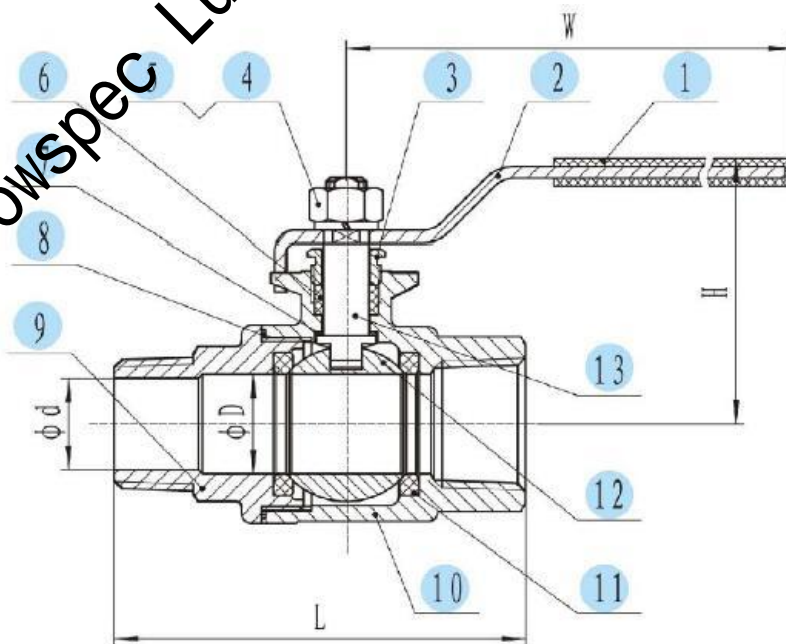



### PARTS AND MATERIALS

ITEM	PART	MATERIAL
13	Stem	SUS304/SUS316
12	Ball	CF8/CF8M,SS304,SS316
11	Seat	RPTFE
10	Body	WCB, CF8/CF8M,SS304,SS316
9	Cap	WCB, CF8/CF8M,SS304,SS316
8	Body seal	PTFE
7	Stem seal	PTFE
6	Stem packing	PTFE
5	Thrust washer	SUS304
4	Stem nut	SUS304
3	Gland nut	SUS304
2	Handle	SUS304
1	Plastic cover	Plastic

### MAIN CONNECTION DIMENSIONS

SIZE	d	L	H	W
3/8"	12.5	66	48	103
1/2"	15	78.5	50	103
3/4"	20	88.5	57	126
1"	25	100	67	144
1-1/4"	32	110.5	72	144
1-1/2"	38	121	93	190
2"	50	141.5	100	190

#### NOTES:

1. As we are constant endeavoring to improve the performance of our equipment.
2. The company reserves the right to make alteration from time to time and equipment differ from that detailed in this brochure.