


IRON Y TYPE STRAINER



FEATURES

- PN10 / PN16 / 125LB / 150LB / JIS10K / 150PSI / 200PSI
- Size: 1-1/2"~24" (40~600mm)
- Materials: A126 B (GG25), A536 65-45-12 (GGG40)
- Face to face: ANSI B16.10, EN 558-1, GB/12221
- Flanged ends: GB/T17241.6, ANSI B16.1/5, EN 1092, JIS10K, AS 2129
- Inspection & testing: API598, GB13927
- Design: ASME B16.34
- Applicable medium: water, oil, gas
- Applicable temperature: -10 ~ +120°C

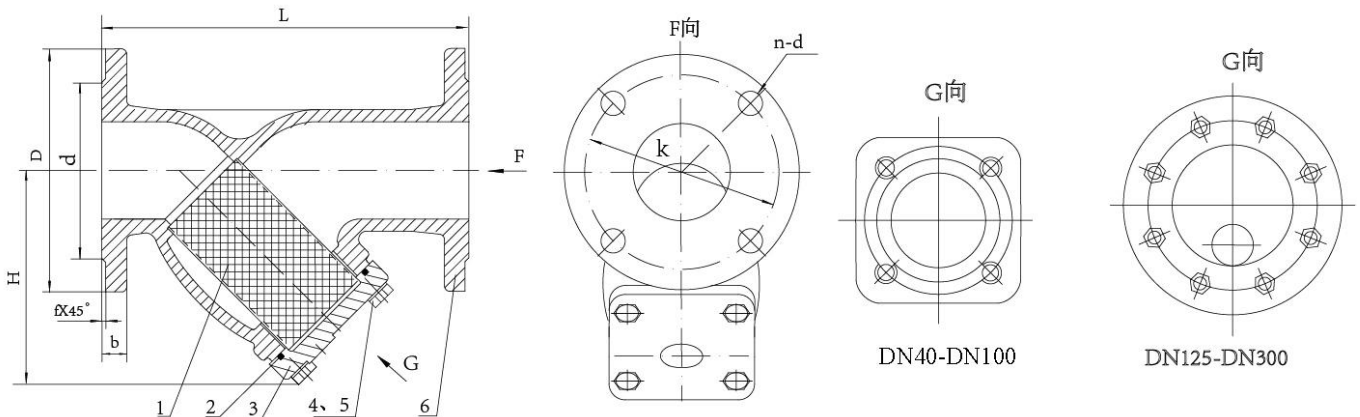

PARTS AND MATERIALS

NO.	PARTS	MATERIALS
1	Screen	CF8 (S.S.304), CF8M (S.S.316)
2	Body	Cast Iron, Ductile Iron
3	Cap	Cast Iron, Ductile Iron
4	Bolts	SUS304, SUS316
5	Nuts	SUS304, SUS316



MAIN CONNECTION DIMENSIONS

DN	D	d	K	L	b	f	n-d	H	Weight(Kgs)
40	150	84	110	200	18	3	4-18	125	9.5
50	165	99	125	230	20	3	4-18	133	12
65	185	118	145	290	20	3	4-18	154	16
80	200	132	160	310	22	3	8-18	176	20
100	220	156	180	350	24	3	8-18	204	28
125	250	184	210	400	26	3	8-18	267	45
150	285	211	240	480	26	3	8-22	310	62
200	340	266	295	600	30	3	12-22	405	112
250	405	319	355	605	32	3	12-26	455	125
300	460	370	410	635	32	4	12-26	516	145
350	520	430	470	696	32	4	16-26	495	214
400	580	482	525	790	38	4	16-30	560	304
450	640	532	585	850	40	4	20-30	641	396
500	715	585	650	978	42	4	20-33	850	450
600	840	685	770	1295	48	5	20-36	980	700

NOTES:

As we are constant endeavoring to improve the performance of our equipment.

The company reserves the right to make alteration from time to time and equipment differ from that detailed in this brochure.

