





DN	d	L	D	C	NO.	h	t	H	D2
50	50	100	130	105	4	15	16	270	160
65	65	115	155	130	4	15	18	300	180
80	80	130	180	145	4	19	18	310	180
100	100	150	200	165	8	19	20	360	224
125	125	170	235	200	8	19	20	390	250
150	150	190	265	230	8	19	22	445	280
200	200	220	320	280	12	23	24	530	315
250	250	275	385	345	12	23	26	650	355
300	300	310	430	390	12	23	28	740	400
350	335	360	480	435	12	25	30	840	500
400	380	395	540	495	16	25	30	940	560

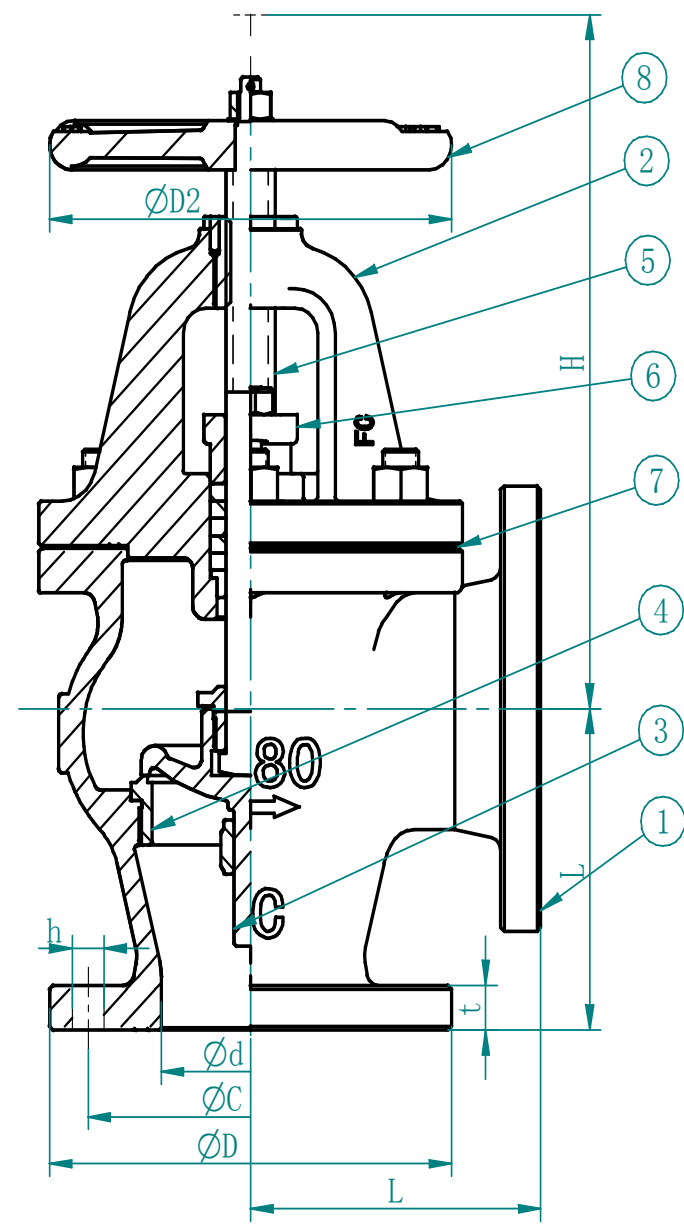

For nominal dia.250 to 400

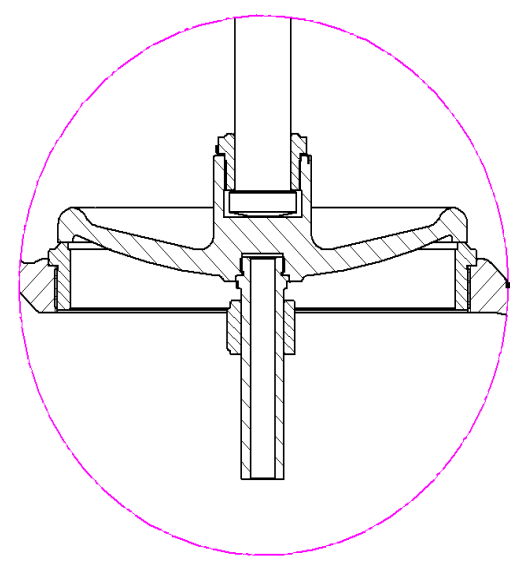

DESIGN STANDARD/设计标准		JIS F 7306-1996	
TEST/检验		JIS F 7400-1996	
HYDRAULTC INSPECTION/压力试验			
TEST PRESSURE / 试验压力 Mpa	DODY / 强度	300 OR LESS	1.05
		350 and 400	0.9
	SEAT / 密封	300 OR LESS	0.77
		350 and 400	0.66
MEDIUM: WATER, AIR, GAS, OIL, STEAM			
TEMPERATURE: ≤205℃			

Flowspec Luokai Industrial Co., Ltd.

8	手轮	HT200		HANDWHEEL	FC200	
7	垫片	非石棉		GASKET	non-asbestos	
6	压盖	ZCuSn5Pb5Zn5		packing gland	BC6	
5	阀杆	HPb59-1	1Cr12	STEM	C3771BD OR BE	SUS 403
4	阀座	ZCuSn5Pb5Zn5	ZG2Cr13	VALVE SEAT	BC6	SCS2
3	阀盘	ZCuSn5Pb5Zn5	ZG2Cr13	DISC	BC6	SCS2
2	阀盖	HT200		BONNET	FC200	
1	阀体	HT200		BODY	FC200	
序号	零件名称	CLASS B	CLASS S	NAME OF PART	CLASS B	CLASS S
		材料			MATERIAL	
铸铁角式截止阀 5K				Cast iron 5K Angle valves		
		Flowspec Industrial Limited				
		Luokai Industrial Co., Ltd.				