


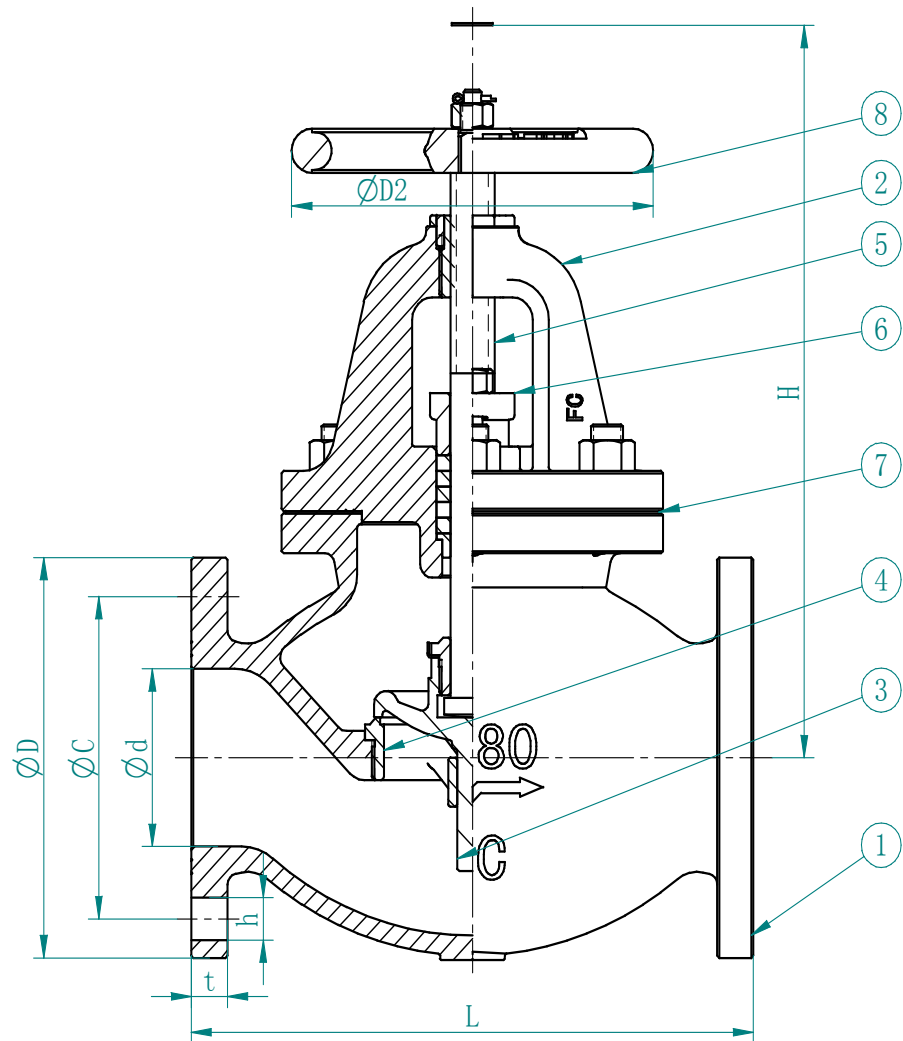

DESIGN STANDARD/设计标准		JIS F 7309-1996
TEST/检验		JIS F 7400-1996
HYDRAULTC INSPECTION/压力试验		
TEST PRESSURE / 试验压力	DODY / 强度	3.3
	SEAT / 密封	2.42
MEDIUM: WATER, AIR, GAS, OIL, STEAM		
TEMPERATURE: ≤205℃		

Flowspec Luokai Industrial Co., Ltd.

DN	d	L	D	C	NO.	h	t	H	D2
50	50	220	155	120	8	19	20	285	160
65	65	270	175	140	8	19	22	310	200
80	80	300	200	160	8	23	24	340	224
100	100	350	225	185	8	23	26	385	250
125	125	430	270	225	8	25	26	455	315
150	150	500	305	260	12	25	28	510	355
200	200	570	350	305	12	25	30	630	450

8	手轮	HT200		HANDWHEEL	FC200	
7	垫片	非石棉		GASKET	non-asbestos	
6	压盖	ZCuSn5Pb5Zn5		packing gland	BC6	
5	阀杆	HPb59-1	1Cr12	STEM	C3771BD OR BE	SUS 403
4	阀座	ZCuSn5Pb5Zn5	ZG2Cr13	VALVE SEAT	BC6	SCS2
3	阀盘	ZCuSn5Pb5Zn5	ZG2Cr13	DISC	BC6	SCS2
2	阀盖	HT200		BONNET	FC200	
1	阀体	HT200		BODY	FC200	
序号	零件名称	CLASS B	CLASS S	NAME OF PART	CLASS B	CLASS S
		材料			MATERIAL	
铸铁球形截止阀 16K				Cast iron 16K globe valves		
 LUOKAI WE MAKE FLOW BETTER		Flowspec Industrial Limited				
		Luokai Industrial Co., Ltd.				