




FRPP、PVDF、CPVC、UPVC、PPH

产品结构特点 Main structural features

执行标准 HG/T 2737-2010

- ① 阀杆采用双重O型环，提高了耐久性和密封性。另外，因设计上部的O型环槽比下部的O型环槽较深，万一阀杆被折断，上部环槽处先发生折断，不会造成内部液体流出。两端为活接式螺旋迫紧压帽，安装方便，更换阀芯。
- ① Stem the use of double O-ring, increased durability and tightness. In addition, due to the design of the Department of the O-ring groove than the lower part of the O-ring groove deeper, if the stem was broken, the top ring groove Department break occurs first, will not cause internal liquid outflow. At both ends is articulated type forced compression screw cap, convenient installation, replace the valve core.

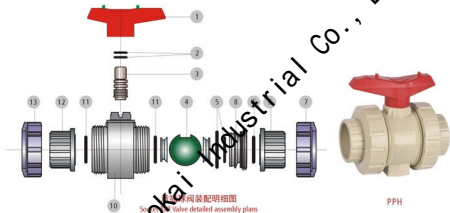

零件材质表 Part material list

件号NO.	名称 Name	材质 Material
1	手柄 Hand wheel	合金料 Alloy material
2	密封圈 Seal ring	EPDM、FPM
3	阀杆 Stem	FRPP/PVDF/UPVC/CPVC/PPH
4	球 Ball	FRPP/PVDF/UPVC/CPVC/PPH
5	密封圈 Seal ring	EPDM、FPM
6	承插、螺纹接头 Socket join	FRPP/PVDF/UPVC/CPVC/PPH
7	压紧螺帽 Tight nut	FRPP/PVDF/UPVC/CPVC/PPH
8	内塞 Inner Plug	FRPP/PVDF/UPVC/CPVC/PPH
9	球密封 Ball seal	PTFE
10	阀体 Body	FRPP/PVDF/UPVC/CPVC/PPH
11	密封圈 Seal ring	EPDM/FPM
12	承插、螺纹接头 Socket join	FRPP/PVDF/UPVC/CPVC/PPH
13	压紧螺帽 Tight nut	FRPP/PVDF/UPVC/CPVC/PPH



承插球阀
Ball Valve
(渐款)

FRPP, PVDF, CPVC, UPVC, PPH, Q₁₁F-65



外形尺寸表 Dimension List

规格DN	d	D	D1	L	L1	L2	H	重量 (KG)				
								UPVC	CPVC	PVDF	RPP	PPH
15	20	32	50	77	110	55	0.17	0.18	0.21	0.12	0.11	
20	25	38	58	87	126	65	0.26	0.28	0.33	0.186	0.182	
25	32	45	70	96	140	70	0.36	0.39	0.46	0.26	0.23	
32	40	55	85	110	160	90	0.6	0.66	0.78	0.44	0.42	
40	50	68	98	120	170	100	0.84	0.92	1.09	0.61	0.58	
50	60	80	124	140	190	110	1.52	1.65	1.96	1.1	1.0	
65	75	96	135	158	230	115	2.2	2.41	2.85	1.6	1.4	
80	90	110	158	180	260	120	3.7	4	4.75	2.67	2.6	
100	100	130	192	224	340	130						

1. 阀门有承插与内螺纹两种连接。
The valve has two kinds of socket with internal thread connection.
2. 此阀门可根据客户要求加装执行器, 可安装气动电动执行器或减速机齿轮箱, 运用相关材料快速安装模块, 螺栓孔尺寸符合相关行业标准。
This valve can be equipped with actuators according to customer requirements, can be installed pneumatic or electric actuators reduction gear box, using the related material quickly install the module, bolt hole size comply with relevant industry standards.



承插球阀

Ball Valve
(密款)

FRPP, PVDF, CPVC, UPVC, PPH, Q₁₁F-6S



外形尺寸表 Dimension List

规格DN	d	D	D1	L	L1	L2	H	重量 (KG)				
								UPVC	CPVC	PVDF	PPH	PPH
15	20	30	46	32	41	106	45	0.18	0.195	0.20	0.13	0.12
20	25	35	58	40	52	125	50	0.29	0.37	0.34	0.21	0.2
25	32	40	70	50	65	145	60	0.42	0.53	0.50	0.30	0.28
32	40	53	81	48	75	170	80	0.65	0.7	0.84	0.47	0.43
40	50	60	98	60	90	180	85					
50	63	78	110	65	105	205	95					
65	75	92	132	70	120	235	110	2.05	2.24	2.65	1.49	1.45
80	90	110	154	90	150	285	130	3.35	3.65	4.33	2.43	2.4
100	110	130	180	126	180	350	155	5.11	5.55	6.6	3.7	3.68

1、阀门有承插与内螺纹两种连接。

The valve has two kinds of socket with internal thread connection.

2、此阀门可根据客户要求加装执行器，可安装气动电动执行器或减速机齿轮箱，运用相关材料快速安装模块，螺栓孔尺寸符合相关行业标准。

This valve can be equipped with actuators according to customer requirements, can be installed pneumatic or electric actuators reduction gear box, using the related material quickly install the module, bolt hole size comply with relevant industry standards.