
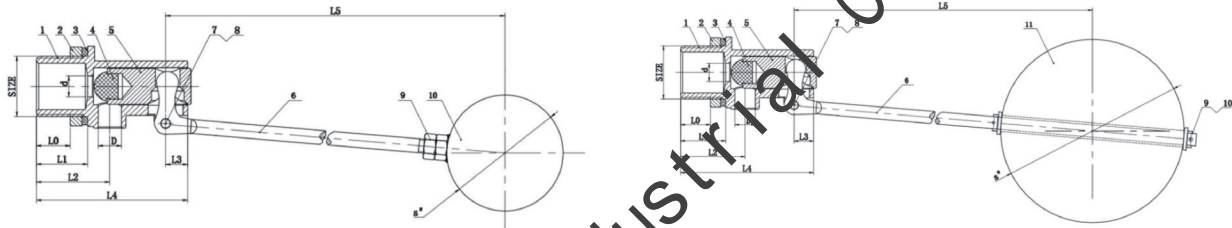


FS-TYPE A FLOAT VALVE

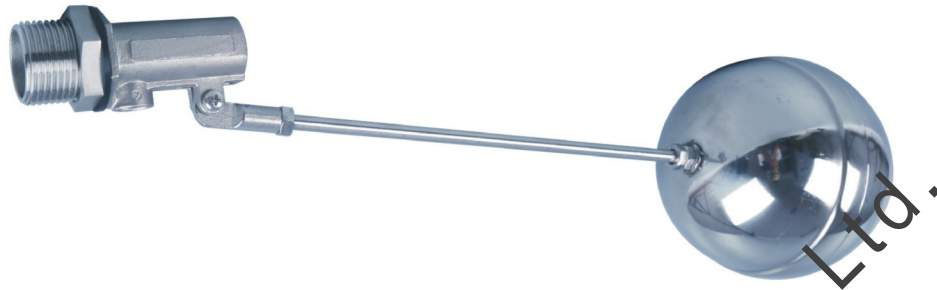

Technical Data:

Design Standard: QB/T1199-1991, BS 1212
 Wall thickness standard: ASME B16.34
 Screw thread standard: ASME B1.20.1, BS21
 DIN 2999/259,ISO 228/1
 JIS B 0203,ISO 7-1
 Testing standard: MSS SP-110, EN12266

Materials:

NO.	Part Name	Material	NO.	Part Name	Material
1	Body	SS304,SS316	7	Nut	SS304, SS316
2	Lock nut	SS304,SS316	8	Screw	SS304, SS316
3	Sealing	NBR	9	Bolt	SS304, SS316
4	Plug	Silicone, NBR	10	Nut	SS304,SS316
5	Piston	SS304,SS316	11	Ball	SS304,SS316
6	Stem	SS304,SS316			

Dimensions:

Size	L0	L1	L2	L3	L4	L5	d	D	S
1/2"	13	22	30	10	65	250	7	8.5	100mm
3/4"	13	22	31	10	65	250	8	10	100mm
1"	19	30	42	15	89	350	13	13	135mm
1 1/4"	22	31	43	15	89	380	13	13	150mm
1 1/2"	27	36	53	22	110	450	21	21	220mm
2"	30	39	61	22	120	450	27	27	250mm
2 1/2"	31	42	84	26	150	580	38	38	300mm
3"	34	48	98	26	170	620	47	47	380mm
4"	40	56	113	26	195	620	60	60	380mm