


XY美标系列液体泄压阀 XY series pressure relief valves

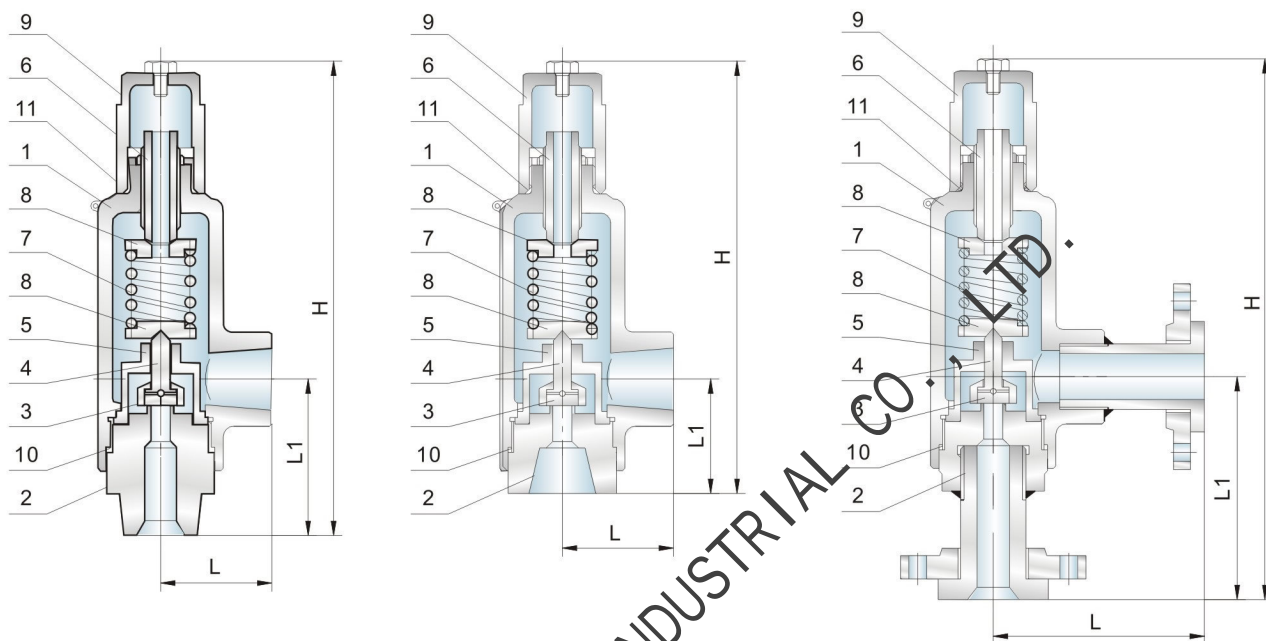

型号代码 Code System

XY

<

例：进口连接为外螺纹，阀体材料为WCB的泄压阀，其型号代码为：XY-MC。

Example: A pressure relief valve, which the inlet connection is male screwed, the material body is WCB, is named XY-MC.



Pressure Relief Valve in Hard Alloy Mill

法兰连接 Flanged Connections

型号 Type	规格 Size	流道 面积 Orifice Area (mm ²)	法兰磅级 Flange Class			最高整定压力 (MPa) Maximum Set Pressure		外形尺寸 (mm) External Dimension			重量 Weight (Kg)					
						进口温度 (℃) Inlet Temperature		L	L1	H						
			编号 No.	进口(Lb) Inlet	出口(Lb) Outlet	-29~38	38~260									
XY	1/4 B 1/4	28 (B=φ6)	0101	150	150	1.27	0.55	100	118	292	6					
			03a01	300		4.24	2.82									
			0601	600		8.51	5.68									
	1/2 B 1/2		0101	150	150	1.27	0.55					100	118	292	6	
			03a01	300		4.24	2.82									
			0601	600		8.51	5.68									
	1/2 C 1/2		0101	150	150	1.27	0.55					100	118	292	6	
			03a01	300		4.24	2.82									
			0601	600		8.51	5.68									
	3/4 C 3/4	0101	150	150	1.27	0.55	100	118	292	6						
		03a01	300		4.24	2.82										
		0601	600		8.51	5.68										
	3/4 C 1	50 (C=φ8)	0101	150	150	1.27	0.55	100	118	292	6					
			03a01	300		4.24	2.82									
			0601	600		8.51	5.68									
	1 C 1		0101	150	150	1.27	0.55					100	118	292	6	
			03a01	300		4.24	2.82									
			0601	600		8.51	5.68									
	3/4 D 3/4		71 (D=φ10)	0101	150	150	1.27					0.55	100	118	292	6
				03a01	300		4.24					2.82				
				0601	600		8.51					5.68				
	3/4 D 1	0101		150	150	1.27	0.55	100	118	292	6					
		03a01		300		4.24	2.82									
		0601		600		8.51	5.68									
	1 D 1	0101		150	150	1.27	0.55	100	118	292	6					
		03a01		300		4.24	2.82									
		0601		600		8.51	5.68									

XY系列液体泄压阀

XY SERIES PRESSURE RELIEF VALVES

螺纹连接 Screwed connections

型 号 Type	规格 Size	流道 面积 Orifice Area (mm ²)	连接螺纹 Connections Screwed		最高整定压力 Maximum Set Pressure (MPa)		尺 寸 Dimensions (mm)			重量 Weight (Kg)
			进口(Lb) Inlet	出口(Lb) Outlet	-29~232	232~427	L	L ₁	H	
XY-MX	1/4 B 1/4	28 (B=φ6)	外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	1/2 B 1/2		外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	1/2 C 1/2	50 (C=φ8)	外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	3/4 C 3/4		外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	3/4 C 1		外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	1 C 1		外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	3/4 D 3/4	71 (D=φ10)	外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	3/4 D 1		外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	
XY-MX	1 D 1		外螺纹	内螺纹	8.51	5.68	50	77	251	4
XY-FX			内螺纹					54	228	



Liquids Pressure Relief Valve in Oil Field